


Ⓣ EMT - Electrical Metallic Tubing

Standard: UL 797, CSA C22.2 NO.83.1 and ANSI C80.3
Application: Used as an unthreaded steel raceway for protection and routing of electrical wiring

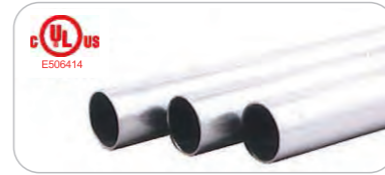

Trade Size	Metric Designator	Outside Diameter		Thickness A		Thickness B		Length		QTY/Bundle
		Inch	mm	Inch	mm	Inch	mm	Feet	meter	
1/2"	16	0.706	17.93	0.042	1.07	0.033	0.85	10	3.05	20
3/4"	21	0.922	23.42	0.049	1.25	0.039	1.00	10	3.05	15
1"	27	1.163	29.54	0.057	1.45	0.043	1.10	10	3.05	10
1-1/4"	35	1.510	38.35	0.065	1.65	0.051	1.30	10	3.05	5
1-1/2"	41	1.740	44.20	0.065	1.65	0.051	1.30	10	3.05	5
2"	53	2.197	55.80	0.065	1.65	0.055	1.40	10	3.05	5
2-1/2"	63	2.875	73.03	0.072	1.83	*	*	10	3.05	3
3"	78	3.500	88.90	0.072	1.83	*	*	10	3.05	3
4"	103	4.500	114.30	0.083	2.11	*	*	10	3.05	1

Tolerances: Length $\pm 0.25"$ (6.35 mm), Outside Diameter 1/2" through 2" $\pm 0.005"$ (0.13 mm), 2 1/2" through 4" $\pm 0.016"$ (0.41 mm),

Note: If you need different thickness or length, please contact

Ⓣ EMT Elbow 90°

Standard: UL 797, CSA C22.2 NO.83.1 and ANSI C80.3
Material: Steel
Application: for use to couple two ends of EMT to form 90 degree bend



TOPELE#	Trade Size	Shelf QTY	Master QTY	Radius(inch)	Offset(inch)
EEL-50s	1/2"	*	150	4.000	6.250
EEL-70s	3/4"	*	100	4.500	7.000
EEL-100s	1"	*	50	5.750	9.250
EEL-125s	1-1/4"	*	30	7.250	10.500
EEL-150s	1-1/2"	*	25	8.250	12.500
EEL-200s	2"	*	20	9.500	14.250
EEL-250s	2-1/2"	*	2	10.500	19.000
EEL-300s	3"	*	2	13.000	20.000
EEL-400s	4"	*	2	16.000	26.000

Ⓣ EMT Connector Set Screw Type

Standard: UL 514B and C22.2 No. 18.3-12
Material: Zinc
Application: for use to bond EMT to a box or enclosure



TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
SSCW-50	1/2"	50	500	1.125	0.722
SSCW-75	3/4"	25	250	1.405	0.945
SSCW-100	1"	20	200	1.594	1.181
SSCW-125	1-1/4"	*	200	1.907	1.535
SSCW-150	1-1/2"	*	100	2.217	1.772
SSCW-200	2"	*	60	2.486	2.217
SSCW-250	2-1/2"	*	30	3.125	2.913
SSCW-300	3"	*	30	3.346	3.563
SSCW-400	4"	*	24	3.740	4.488

Ⓣ EMT Coupling Set Screw Type

Standard: UL 514B and C22.2 No. 18.3-12
Material: Zinc
Application: for use to couple two ends of EMT



TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
SSCP-50	1/2"	50	500	1.500	0.720
SSCP-75	3/4"	25	250	1.880	0.945
SSCP-100	1"	20	200	2.059	1.181
SSCP-125	1-1/4"	*	150	2.504	1.522
SSCP-150	1-1/2"	*	150	2.883	1.753
SSCP-200	2"	*	60	3.405	2.220
SSCP-250	2-1/2"	*	30	4.000	2.913
SSCP-300	3"	*	30	4.488	3.563
SSCP-400	4"	*	24	5.236	4.488

Ⓣ EMT Connector Set Screw Type


Standard: UL 514B and C22.2 No. 18.3-12
Material: Steel
Application: for use to bond EMT to a box or enclosure



TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
SSCN-50S	1/2"	40	400	1.452	0.722
SSCN-75S	3/4"	25	250	1.525	0.961
SSCN-100S	1"	*	250	1.625	1.185
SSCN-125S	1-1/4"	*	120	2.250	1.541
SSCN-150S	1-1/2"	*	100	2.520	1.785
SSCN-200S	2"	*	75	2.760	2.217
SSCN-250S	2-1/2"	*	12	3.315	2.818
SSCN-300S	3"	*	8	3.750	3.550
SSCN-400S	4"	*	6	4.185	4.550

Ⓣ EMT Coupling Set Screw Type

Standard: UL 514B and C22.2 No. 18.3-12
Material: Steel
Application: for use to couple two ends of EMT

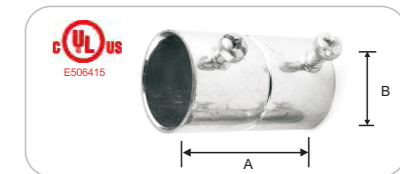

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
SSCP-50S	1/2"	50	500	1.680	0.722
SSCP-75S	3/4"	25	250	2.120	0.961
SSCP-100S	1"	*	200	2.498	1.185
SSCP-125S	1-1/4"	*	100	3.250	1.541
SSCP-150S	1-1/2"	*	80	3.745	1.785
SSCP-200S	2"	*	50	4.000	2.217
SSCP-250S	2-1/2"	*	12	4.248	2.818
SSCP-300S	3"	*	8	4.500	3.550
SSCP-400S	4"	*	6	5.000	4.550