



Ⓢ Pipe Clamp with Rubber

Material: Steel

Application: mounting element with rubber insulation for EMT,IMC and Rigid




TOPELE#	Trade Size	Shelf QTY	Master QTY	Top Thread	OD RANGE
PCWR-50	1/2"	20	200	M8+M10	17-23
PCWR-75	3/4"	16	160	M8+M10	23-29
PCWR-100	1"	16	160	M8+M10	29-35
PCWR-125	1-1/4"	*	*	M8+M10	37-43
PCWR-150	1-1/2"	10	100	M8+M10	43-49
PCWR-200	2"	10	100	M8+M10	55-61
PCWR-250	2-1/2"	*	*	M8+M10	70-75
PCWR-300	3"	*	*	M8+M10	85-90
PCWR-350	3-1/2"	*	*	M8+M10	99-103
PCWR-400	4"	*	*	M8+M10	110-115

Ⓢ Conduit Hanger

Standard: UL 2239 and CSA C22.2 No.18.4-04

Material: Steel

Application: for use to suspend conduit from overhead supports

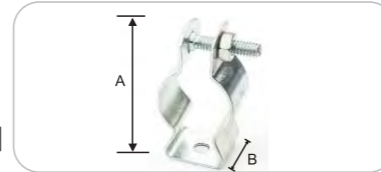

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
CH-50	1/2"	*	400	1.878	0.751
CH-75	3/4"	*	400	2.125	0.751
CH-100	1"	*	300	2.435	0.875
CH-125	1-1/4"	*	300	2.752	0.875
CH-150	1-1/2"	*	50	3.125	1.000
CH-200	2"	*	50	3.875	1.000
CH-250	2-1/2"	*	50	4.625	1.250
CH-300	3"	*	25	5.500	1.250
CH-350	3-1/2"	*	25	5.752	1.250
CH-400	4"	*	10	6.245	1.250

Ⓢ Conduit Fasteners

Material: Steel

Application: provides for fast and easy installation with pliers




TOPELE#	Trade Size	Shelf QTY	Master QTY	Vertical load	Horizontal Load
CF-50/75	1/2" & 3/4"	*	800	100 LBS	25 LBS
CF-100	1"	*	500	100 LBS	25 LBS
CF-125	1-1/4"	*	250	100 LBS	25 LBS
CF-150	1-1/2"	*	250	100 LBS	25 LBS
CF-200	2"	*	250	100 LBS	25 LBS

Ⓢ U Bolt

Material: Steel

Application: for use to run and support EMT,IMC and Rigid in electrical systems

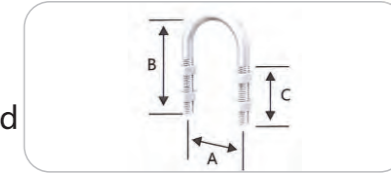

TOPELE#	Trade Size	Thread Size	Dim A		Dim B		Dim C	
			Inch	mm	Inch	mm	Inch	mm
U50	1/2"	5/16"-18	1.25	31.75	2.38	60.45	1.50	38.10
U75	3/4"	5/16"-18	1.44	36.58	2.75	69.85	1.50	38.10
U100	1"	5/16"-18	1.69	42.93	3.00	76.20	1.50	38.10
U125	1-1/4"	5/16"-18	2.06	52.32	3.13	79.50	1.50	38.10
U150	1-1/2"	5/16"-18	2.31	58.67	3.50	88.90	1.50	38.10
U200	2"	5/8"-16	2.81	71.37	4.38	111.25	1.88	47.75
U250	2-1/2"	5/8"-16	3.38	85.85	4.75	120.65	1.88	47.75
U300	3"	5/8"-16	4.00	101.60	5.38	136.65	1.88	47.75
U350	3-1/2"	5/8"-16	4.50	114.30	5.75	146.05	1.88	47.75
U400	4"	5/8"-16	5.00	127.00	6.63	168.40	1.88	47.75

Ⓢ Strut Clamp

Standard: UL 2239 and CSA C22.2 No.18.4-04

Material: Steel

Application: for use to support EMT, Rigid or IMC conduit to the strut channel




TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
TPSC-050	1/2"	*	400	2.302	1.241
TPSC-075	3/4"	*	350	2.458	1.241
TPSC-100	1"	*	300	2.680	1.241
TPSC-125	1-1/4"	*	300	3.210	1.241
TPSC-150	1-1/2"	*	250	3.415	1.241
TPSC-200	2"	*	200	4.000	1.241
TPSC-250	2-1/2"	*	150	5.000	1.241
TPSC-300	3"	*	150	5.555	1.241
TPSC-350	3-1/2"	*	*	6.000	1.241
TPSC-400	4"	*	100	6.500	1.241

Ⓢ RC Clamp

Material: steel

Application: for use to support EMT and Conduits to the Riel RC 19X35

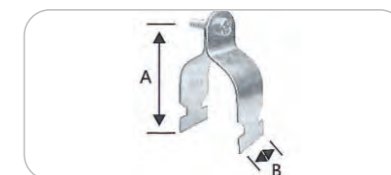

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
RCC-50	1/2"	*	600	1.984	1.024
RCC-75	3/4"	*	600	2.283	1.024
RCC-100	1"	*	500	2.626	1.024
RCC-125	1-1/4"	*	350	3.055	1.024
RCC-150	1-1/2"	*	350	3.181	1.024
RCC-200	2"	*	300	3.780	1.024
RCC-250	2-1/2"	*	*	4.488	1.024
RCC-300	3"	*	*	5.197	1.024
RCC-400	4"	*	*	*	1.024